


Rotary Servo Motors

Model Designation (Note 11)

For 200 V class

HG - KR 05 3 B

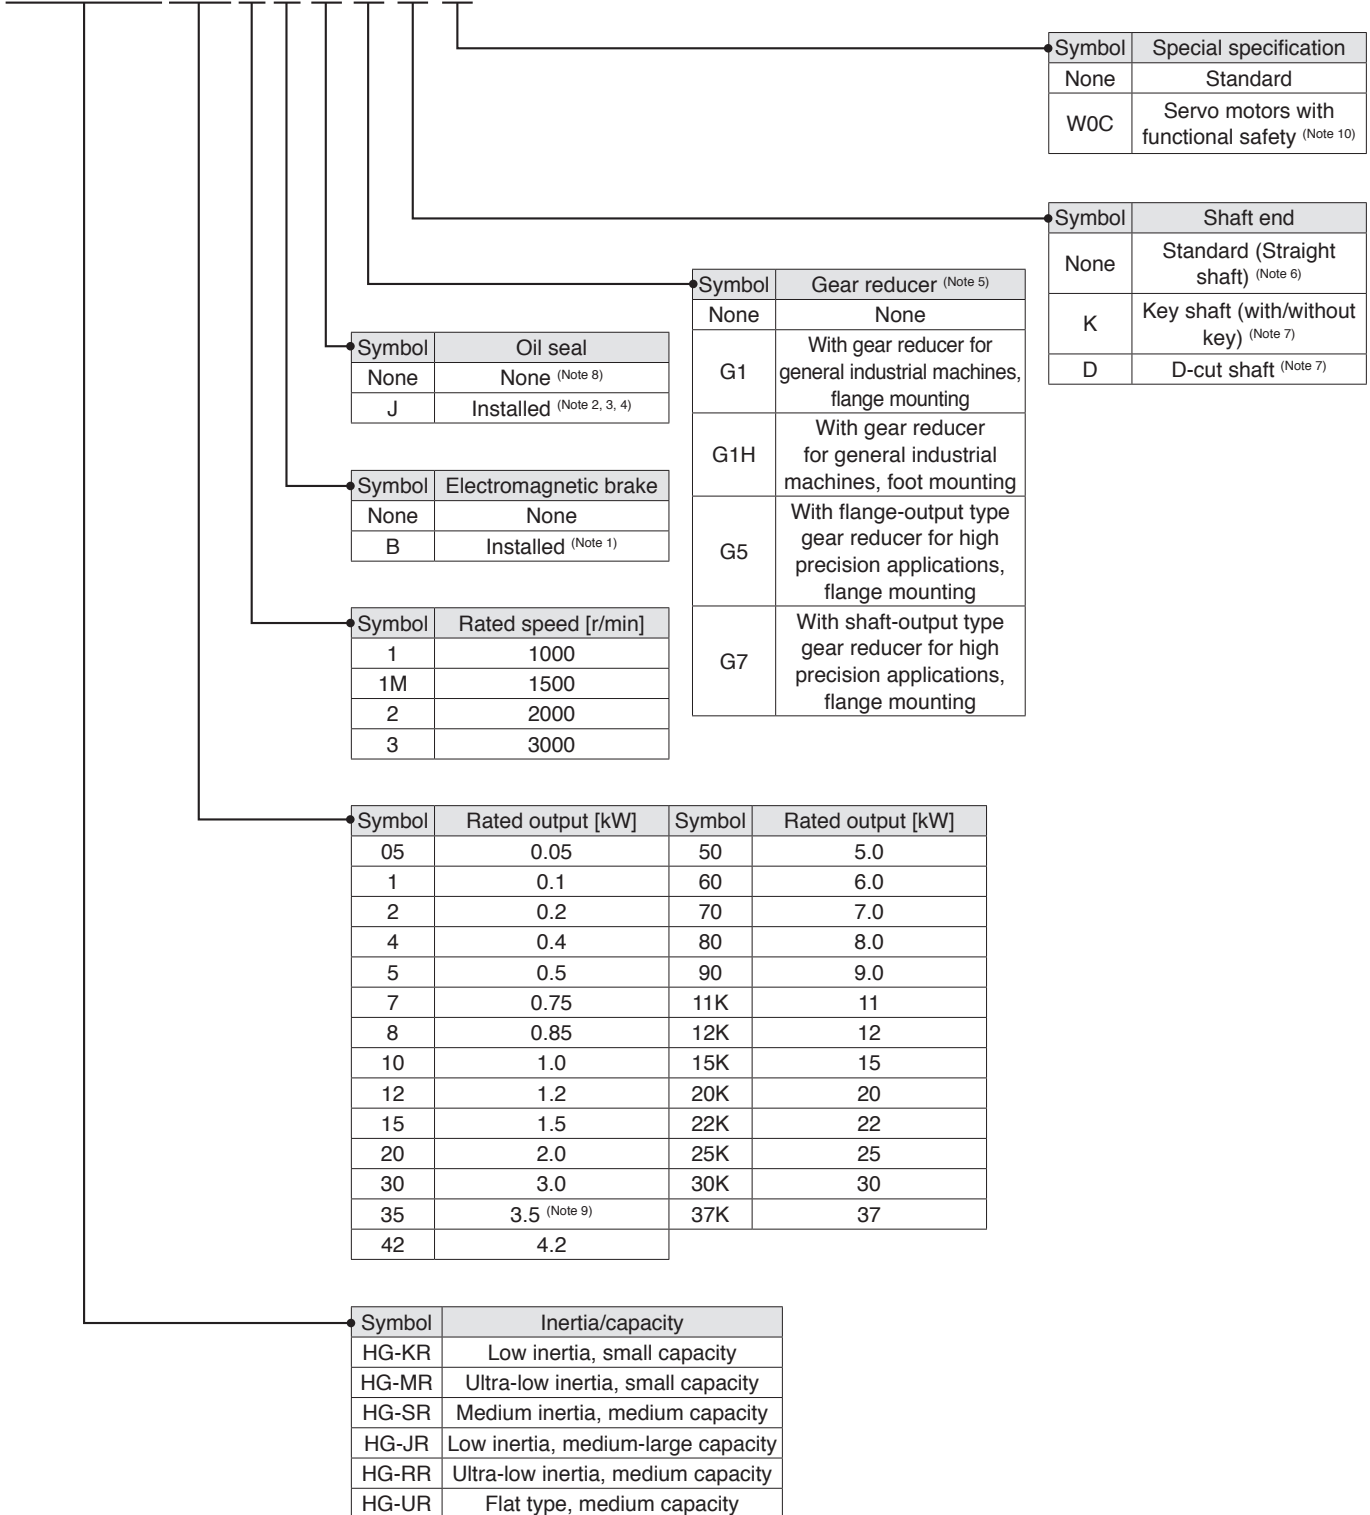

- Notes: 1. Refer to electromagnetic brake specifications of each servo motor series in this catalog for the available models and detailed specifications.
 2. Available in 0.1 kW or larger HG-KR/HG-MR series and all HG-SR series.
 3. Oil seal is not installed in the geared servo motor.
 4. Dimensions for HG-KR/HG-MR series with oil seal are different from those without oil seal. Contact your local sales office for more details. For HG-SR series, dimensions are the same regardless of whether or not oil seal is installed.
 5. Refer to "Geared Servo Motor Specifications" in this catalog for the available models and detailed specifications.
 6. Standard HG-SR G1/G1H has a key shaft (with key).
 7. Refer to special shaft end specifications of each servo motor series in this catalog for the available models and detailed specifications.
 8. Oil seal is installed in HG-JR, HG-RR, and HG-UR series as a standard.
 9. For HG-JR353(B), the rated output varies depending on the servo amplifier to be combined. Refer to "HG-JR 3000 r/min Series (Low Inertia, Medium Capacity) (200 V Class) Specifications" in this catalog for details.
 10. Contact your local sales office for the servo motors with functional safety.
 11. This section describes what each symbol in a model name indicates. Some combinations of symbols are not available.